

(19) 世界知的所有権機関  
国際事務局



(43) 国際公開日  
2004 年 5 月 6 日 (06.05.2004)

PCT

(10) 国際公開番号  
WO 2004/039071 A1

- (51) 国際特許分類<sup>7</sup>: H04N 5/335, H01L 27/14, G02B 3/00
- (21) 国際出願番号: PCT/JP2003/013617
- (22) 国際出願日: 2003 年 10 月 24 日 (24.10.2003)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:  
特願 2002-310375  
2002 年 10 月 25 日 (25.10.2002) JP
- (71) 出願人 (米国を除く全ての指定国について): コニカミノルタホールディングス株式会社 (KONICA


MINOLTA HOLDINGS, INC.) [JP/JP]; 〒100-0005 東京都千代田区丸の内一丁目 6 番 1 号 Tokyo (JP). 独立行政法人科学技術振興機構 (JAPAN SCIENCE AND TECHNOLOGY AGENCY) [JP/JP]; 〒332-0012 埼玉県川口市本町四丁目 1 番 8 号 Saitama (JP).

- (72) 発明者; および  
(75) 発明者/出願人 (米国についてのみ): 宮武 茂博 (MIY-ATAKE, Shigehiro) [JP/JP]; 〒543-0033 大阪府大阪市天王寺区堂ヶ芝二丁目 1 番 1-6 0 6 Osaka (JP). 谷田 純 (TANIDA, Jun) [JP/JP]; 〒654-0122 兵庫県神戸市須磨区道正台一丁目 1 番 4-7 1 0 Hyogo (JP). 山田 憲嗣 (YAMADA, Kenji) [JP/JP]; 〒586-0042 大阪府河内長野市日東町 1 6-1 3 Osaka (JP).

[続葉有]

(54) Title: IMAGE INPUT DEVICE

(54) 発明の名称: 画像入力装置

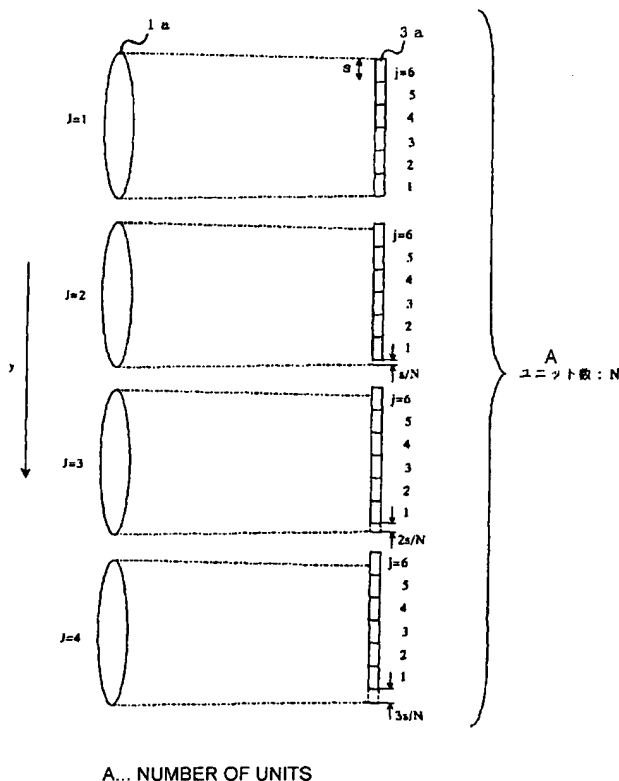

(57) Abstract: An image input device which reconfigures a single reconfigured image from a plurality of low-resolution object reduction images formed in a specified region on the light receiving element by the micro-lens array, wherein a high-resolution, single reconfigured image can be obtained even if the distance between the subject and the micro-lens array is large (infinitely large, for example), and further a reconfigured image can be realized in colors. The image input device is characterized by being disposed so that the relative distance between a micro-lens (1a) and a light receiving cell (3a) in a specified area where an object reduction image corresponding to the micro-lens (1a) is formed is different with different micro-lenses (1a). In addition, the light receiving cell (3a) is segmented into a plurality of regions, and a color filter (primary color filter, or complementary filter, for example) is disposed in each segmented region.

(57) 要約: 前記マイクロレンズアレイによって前記受光素子上の所定領域に結像される複数の低解像度な物体縮小像から単一の再構成画像を再構成する画像入力装置において、被写体と前記マイクロレンズアレイとの距離が大きい(例えば、無限遠)である場合にも、高解像度な単一の再構成画像を取得可能であり、更には、再構成される再構成画像のカラー化を実現し得る画像入力装置を提供すること。マイクロレンズ1aと、該マイクロレンズ1aに対応する物体縮小像が結像される所定領域内の受光セル3aとの間の相対位置が、前記マイク

ロレンズ1a毎に異なるよう配置されてなることを特徴とする画像入力装置として構成する。更には、前記受光セル3aを複数の領域に区分すると共に、該区分された領域毎にカラーフィルタ(例えば、原色フィルタ、或いは補色カラーフィルタ)を配置する。



(74) 代理人: 本庄 武男 (HONJO,Takeo); 〒542-0081 大阪府大阪市中央区南船場2丁目7番11号 カーニープレイス南船場 Osaka (JP).

(81) 指定国 (国内): US.

(84) 指定国 (広域): ヨーロッパ特許 (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

規則4.17に規定する申立て:

- すべての指定国のための先の出願に基づく優先権を主張する出願人の資格に関する申立て(規則4.17(iii))

添付公開書類:

- 国際調査報告書
- 請求の範囲の補正の期限前の公開であり、補正書受領の際には再公開される。

2文字コード及び他の略語については、定期発行される各PCTガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

DUPLICATE

13/pets

10/532659  
JC20 Rec'd T/PTO 25 APR 2005

## IMAGE INPUT APPARATUS

### BACKGROUND OF THE INVENTION

#### Field of the Invention

5       The present invention relates to an image input apparatus which can reconfigure a single, high-resolution object image from a plurality of low-resolution, object reduced images obtained by a plurality of micro-lens, wherein a high-resolution image of the object image can be obtained even if the imaging distance is long (infinitely long, for example), and the object image can be realized in colors.

10

#### Description of the Related Art

With the arrival of the information society accompanying with the development of the media for communication, image input devices such as digital cameras and video cameras for obtaining the image by a single optical system facing the subject, have  
15 already been in use as the image reader which allows effectively obtaining various kinds of high-quality image information.

However, in these days, the image reader imitating the compound-eye found in insects has being developed to meet the requirements of the further downsizing and thinning of the image input apparatus. (e.g. Japanese Patent Publication  
20 No.2001-61109)

The above-mentioned image input apparatus is schematically comprising a micro-lens array having a plurality of micro-lens and planate light detecting elements facing the micro-lens array, wherein a plurality of low-resolution reduced images are focused in the prescribed region on the said light detecting element by the said

micro-lens array, and a single object image is reconfigured by signal processing of said reduced object image.

According to the aforesaid mechanism, the image input apparatus, in spite of being small and thin compared with the apparatus comprising a single optical system,  
5 realizes bright optical system and even makes obtained (reconfigured) object image (hereinafter referred to as “reconfigured image”) as highly fine.

The image input apparatus comprising the said compound-eye mechanism is characterized by imaging the subject from different viewpoints by having parallax between the said micro-lenses. The above-mentioned character (parallax between the  
10 micro-lenses) enables object reduced images, which are focused on the prescribed position on the said light detecting element, to form the different images on each micro-lens (images which include different image information), and as a result, a single reconfigured image obtained by rearranging the said object reduced images can be obtained as a highly fine image (contains more image information).

15 However, in the conventional image input apparatus, when the distance from the subject is long (infinitely long, for example), the parallax between micro-lenses, which is characterized to the said image input apparatus, disappears, and therefore, the difference between object reduced images also disappears (becomes the same). This creates the problem of remarkable decrease of image resolution compared to the case  
20 when taking an image of close subject (when there is a parallax between said micro-lenses).

Moreover, the image information obtained by image input apparatus, is preferably recreated by the real colors (colorizing) of the subject. Consequently, as the technology of colorizing the reconfigured image obtained by the image input apparatus

comprising the above-mentioned structure, the arrangement of color filters to every micro-lens was suggested, and has been applied for a patent under Japanese Patent Application No. 2001-363117 by the present applicant. However, the technology for colorizing is not limited to the above-mentioned formula, and it is necessary and expected to develop another formula.

Therefore, the present image input apparatus has been invented considering the foregoing conditions, and the first object of this invention is to provide the image input apparatus which can reconfigure a single reconfigured image from a plurality of low-resolution, object reduced images focused on the prescribed region on the said light detecting elements by the micro-lens array, wherein a high-resolution, single reconfigured image of the subject can be obtained even if the distance between the subject and the said micro-lens array is long (infinitely long, for example).

Furthermore, the second object is to provide the new formula, which can realize the colorizing of the reconfigured image.

## SUMMARY OF THE INVENTION

In order to achieve the foregoing first object, this invention provides an image input apparatus comprising a micro-lens array where a plurality of micro-lenses are arrayed and the light detecting element facing the said micro-lens array, wherein a single object image can be obtained by rearranging the image information of a plurality of object reduced images focused on the prescribed region on the light detecting element by each of the said micro-lens, and characterized in that the relative position between the said micro-lens and the prescribed region on the light detecting element, on which the object reduced image is focused as corresponding to the said micro-lens, are

arranged so as to differ between each of the said micro-lenses.

Here, as the relative position noted above, the construction that can shift the relative position by  $s/N$  ( $s$ : pitch of light detecting element,  $N$ : number of micro-lens unit) sequentially along with the vertical direction and the horizontal direction on the  
5 said micro-lens array may be suggested.

According to the said construction, even if the distance between micro-lens and the subject is infinitely long, the object reduced images focused on the light detecting element can be differed at every micro-lenses, furthermore, the resolution of the reconfigured image obtained by the rearrangement of image information of the object  
10 reduced images can be increased.

At the same time, if the distance between the said micro-lens and the subject is  $b$ , in other words, the magnification for the subject is  $(m)$   $\{m=b/a$  ( $a$ : the distance between micro-lens and light detecting element,  $b$ : the distance between micro-lens and the subject) $\}$ , the said relative position can be shifted by  $(s/N - D/m)$  ( $s$ : pitch of light  
15 detecting element,  $N$ : number of micro-lens unit,  $D$ : pitch of micro-lens,  $m$ : magnification for the subject achieved by the micro-lens) sequentially along with the vertical direction and the horizontal direction on the said micro-lens array.

According to the foregoing system, since the said relative position is adjusted corresponding to the distance to the subject (i.e. magnification), it is capable of focusing  
20 the different object reduced image on the light detecting element consistently, irrespective of the distance to the subject, and moreover, the resolution of the single reconfigured image obtained by the rearrangement of image information of the object reduced images can be increased. More details will hereinafter be described.

Also, when obtaining a single object image by rearranging a plurality of pixel

information of the object reduced images formed on the light detecting element by respective micro-lenses, it is preferred that the rearranging position of the object image, on which pixel information of the object reduced images are supposed to be rearranged, is decided on the basis of the said relative position.

5           Accordingly, the resolution of the said object image can be improved using the difference of the said object reduced images arising from the difference between the said relative positions by fixing the rearranged position of pixel information of the said reduced-images.

At the same time, if the distance between the said micro-lens and the subject is  
10   (b), in other words, the magnification for the subject is (m)  $\{m=b/a$  (a: the distance between micro-lens and light detecting element, b: the distance between micro-lens and the subject)), the said rearranging position may be fixed to shift by  $(s/N + D/m)\{(s):$  pitch of light detecting element, (N): number of micro-lens units, (D): pitch of micro-lens, m: magnification of micro-lens for the subject. Besides,  $m= b/a$  (a: the  
15 distance between the micro-lens and the light detecting element, b: the distance between the micro-lens and the subject)) sequentially along with the vertical direction and the horizontal direction on the said micro-lens array.

In the foregoing construction, as will hereinafter described, it is capable of making the decreasing degree of resolution to the minor even when the distance to the  
20 subject changes, and its convenience as an image input apparatus can be improved.

In order to achieve the said second object, this invention comprises a light detecting element containing a plurality of light detecting cells, wherein the said light detecting cell is divided into multiple regions, and at the same time, a color filter is arranged on each of the said divided regions.

Accordingly, it is capable of obtaining the object image in colors from the object reduced images focused on the said light detecting element, thereby realizing the image input apparatus which can obtain more high-quality images. As such construction can be realized from the basis of conventional systems, it is also excellent from the view  
5 that the rising of manufacturing cost is controlled to the minimum.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a perspective view showing a schematic structure of the image input apparatus (A) according to an embodiment of the present invention;

10 Fig. 2 is a plane view showing the arrangement of micro-lenses array in the image input apparatus (A) according to an embodiment of the present invention;

Fig. 3 is a plane view showing the arrangement of light detecting element in the image input apparatus (A) according to an embodiment of the present invention;

Fig. 4 is a cross-sectional view showing a frame format of a pattern example of  
15 positional relationship between the micro-lens array and the light detecting element in the image input apparatus (A) according to an embodiment of the present invention;

Fig. 5 is a figure showing a frame format of a pattern example of the rearranged (reconstructed) object image.

Fig. 6 is a figure showing a frame format of another pattern example of the  
20 rearranged (reconstructed) object image.

Fig. 7 is a cross-sectional view showing a frame format of another pattern example of positional relationship between the micro-lens array and the light detecting element in the image input apparatus (A) according to an embodiment of the present invention;



Fig. 8 is a figure showing a frame format of another pattern example of the rearranged (reconstructed) object image.

Fig. 9 is a cross-sectional view showing a frame format of another example of positional relationship between the micro-lens array and the light detecting element in the image input apparatus (A) according to an embodiment of the present invention;

Fig. 10 is a figure showing a frame format of another pattern example of the rearranged (reconstructed) object image.

Fig. 11 is a figure showing a frame format of another pattern example of the rearranged (reconstructed) object image.

Fig. 12 is a figure showing an example of color filters arranged on the light detecting element.

Fig. 13 is a figure showing another example of color filters arranged on the light detecting element.

## **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

With embodiments of the present invention described hereinafter with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments, and that various changes and modifications may be effected therein by one skilled in the art without departing from the scope or spirit of the invention as defined in the appended claims.

The image input apparatus according to the embodiments of the present invention is embodied as indicated in Fig. 1.

As shown in Fig. 1, the image input apparatus (A) is comprised of a micro-lens

array (1) arraying a plurality of micro-lenses (1a) in a grid-like pattern, a light detecting element (3) forming planimetrically a plurality of light detecting cells (3a), and a grid-shaped partition wall (2) arranged between micro-lens array (1) and light detecting element (3). Here, as indicated by the rectangular column of dotted line in the Fig.1, micro-lens (1a) forms a signal-processing unit (U), which correspondingly comprises one grid of partition wall (2), as well as a plurality of light detecting cells (3a) included in the rectangular column (prescribed region).

Accordingly, image input apparatus (A) with compound-eye is similar to the conventional image input apparatus in the basic concept of obtaining a single, high-resolution reconfigured image by focusing the object reduced images of the subject in respective unit (U), then reconfiguring the object reduced images.

One example of the specification of image input apparatus (A) is described hereinafter. However, please note that the embodiment of the subject invention should not be limited to the following specification.

15      Micro-lens array (1)

Number of lenses    10 x 10

Lens pitch    499 micron x 499 micron

Focal length    1.0 mm

Partition Wall (2)

20      Partition wall pitch    499 micron

Height of the Partition wall    1.0 mm

Thickness of the Partition wall    39 micron

Size of the opening of the Partition wall    460 micron x 460 micron

Light detecting element (3)

Number of pixels 500 x 500

Size of pixels 10 x 10 micron

With reference to the accompanying drawings Fig. 2 to Fig. 4, as the features of  
5 image input apparatus (A), the structure wherein the relative position between  
micro-lens (1a) and light detecting cells (3a) responding to micro-lenses (1a), is arrayed  
in the way the said relative position differs for each of micro-lens (1a), as well as the  
processing for reconfiguring the reconfigured image from image information of the  
object reduced images focused on light detecting cells (3a), will be explained below.

10 Here, Fig. 2 is a plane view of micro-lens array (1), and indicates the  
arrangement example of the whole unit, which comprises (N) number of micro-lenses  
(1a) in both horizontal and vertical directions.

Fig. 3 is a plane view of light detecting element (3), and indicates the  
arrangement example where each unit comprises (n) number of light detecting cells (3a)  
15 in both horizontal and vertical directions.

Fig. 4 is a cross-sectional view of image input apparatus (A) indicating the  
frame format of the positional relationship between micro-lens (1a) and light detecting  
cells (3a), and one example of when the number of units (N) =4 (J=1 to 4) and the  
number of light detecting cells (n)=6 (j=1 to 6) is indicated. Also, in order to simplify  
20 the figure, the Fig. 4 only indicates the vertical direction (indicated in the figure by the  
arrow "y"), but the same positional relationship exists in the horizontal direction.

As indicated in Fig. 4, the subject embodiment is characterized by arranging the  
relative position between light detecting cells (3a) and micro-lens (1a) differently in  
each unit (i.e. micro-lens (1a)). In particular, when the number of units is (N) and the

pitch of light detecting cells (3a) is (s), the relative position shift by  $s/N$  per unit sequentially in a vertical direction as well as a horizontal direction of micro-lenses (1a) arrangement.

Therefore, it is capable of making the object reduced images focused on light  
5 detecting element (3a) different in each unit even when the image of the subject at infinity is taken, furthermore, the resolution of the reconfigured image obtained by the rearrangement of pixel information of the object reduced images can be increased.

As in the above described structure indicated in Fig.2 to Fig.4, one example of the procedure for reconfiguring single reconfigured image corresponding to  $(N) \times (n)$   
10 pixels for both the horizontal and the vertical direction, from  $(N)$  number of object reduced images, which are different each other and focused on light detecting cells (3a), is described hereinafter as referring to the Fig. 5.

The procedure of reconfiguration explained below is one example of the applicable procedure in reconfiguring the object image, and the several procedures other  
15 than the procedure below are applicable to the subject invention.

#### (Procedure of rearrangement)

Here, coordinates of the reconfigured image are presumed to be  $(x, y)$ , and one coordinate (hereunder, the vertical direction “y”) is explained in order to simplify the  
20 explanation.

When the pixel information of y-coordinate in the reconfigured image is presumed to be “reconfigured image y”, the followings are rearranged in the “reconfigured image y”.

reconfigured image 1 : the first signal of pixel in unit 1  
reconfigured image 2 : the first signal of pixel in unit 2  
:  
:  
5 reconfigured image N : the first signal of pixel in unit N  
reconfigured image N + 1 : the second signal of pixel in unit 1  
reconfigured image N + 2 : the second signal of pixel in unit 2  
:  
:  
10 reconfigured image 2N : the second signal of pixel in unit N  
reconfigured image 2N + 1 : the third signal of pixel in unit 1  
:  
:  
reconfigured image 3N : the third signal of pixel in unit N  
15 reconfigured image 3N + 1 : the fourth signal of pixel in unit 1  
:  
:  
reconfigured image (n-1) x (N) + 1 : the (n)th signal of pixel in unit 1  
:  
20 :  
reconfigured image (n) x (N) : the (n)th signal of pixel in unit N

In accordance with the above-mentioned reconfiguring procedure, Fig. 5 shows an example of reconfigured image rearranged image information (i.e., light detecting

cell  $j=1$  to  $j=6$ ) of the object reduced images of the subject at infinity focused in each units ( $J = 1$  to  $4$ ) indicated in Fig. 4. The figure shows the case when the size of the reconfigured image is  $(n) \times (s)$ . Also, the number (1) to (24) shown respectively in the light detecting cells are coordinate  $y$  of the reconfigured image.

5        Accordingly, when the subject is at infinity, all micro-lenses (1a) obtain the same image information, however, slightly different object reduced images are focused on light detecting cells (3a) because light detecting cells (3a) are arranged in relative position shifted by  $s/N$ , in accordance with the subject embodiment.

10        Consequently, when reconfiguring a reconfigured image from object reduced images, it is understandable that a high-resolution reconfigured image can be obtained from a plurality of object reduced images by rearranging light detecting cells (3a) shifted by  $s/N$  sequentially in the order of  $j=1$  in  $J=1$  unit,  $j=1$  in  $J=2$  unit...as considering the difference of relative position (i.e., as has been described in the reconfiguring procedure).

15        Next, as referring to Fig. 6, the procedure for reconfiguring a reconfigured image from object reduced images when the subject is not at infinity, and the distance between micro-lens (1a) and the subject is  $(b)$  (hereinafter referred to as “imaging distance  $(b)$ ”), that is, the magnification for the subject is  $(m) (=b/a)$  { $a$ : distance between micro-lens (1a) and light detecting cells (3a)} is described.

20        Here, Fig. 6 shows a frame format of one example of the reconfigured image, when the magnification of the subject for the image is  $(m) (=b/a)$ , simultaneously where the size of the reconfigured image is  $(n) \times (s)$ .

In this case, light detecting cells (3a) are rearranged having shifting of  $D/m$  in addition to the case in Fig. 5, compared with the case when the subject is at infinity

(indicated in Fig. 5). However, (D) is a pitch of each unit ( $D/m < s/N$ ).

The important point here is that pixel information shifted significantly from pitch (s) is outputted by additional D/m shifting of the light detecting cells (3a) (i.e. pixel information). Concretely, it is the pixel information obtained by J=4 unit in Fig.

5 6. Such pixel information (misaligned more than (s)) becomes redundant, and therefore dose not contribute to the improvement of resolution.

It is preferred in this case to form the reconfigured image as deleting the redundant image information.

Concretely, in case of Fig. 6, the rearrangement can be performed in the order of  
10 j=1(1) in J=1 unit, j=1(2) in J=2 unit, j=1(3) in J=3 unit, J=2(5) in J=1 unit, j=2(6) in J=2 unit..., though j=1(4) and j= 2(8)...., in J=4 unit are not used.

In this case, although the resolution becomes lower by the unused light detecting cells (3a) (light detecting cell (3a) in J=4 unit) compared with the resolution in case of focusing the subject at infinite (indicated in Fig. 5, when all pixel information of light  
15 detecting cells (3a) are used to reconfigure), the decreasing rate is minor.

Here, as an example of the concrete embodiment, it is explained that the decreasing degree of resolution is minor considering the image input apparatus specified as below.

(One example of specification)

20 Unit pitch (D)=499 micron

Light detecting cell pitch (s)=10 micron

Micro-lens focal distance (f)=1mm

Number of unit (N)=10

Number of the light detecting cells per 1 unit =46

According to the above specified image input apparatus, it is calculated that magnification  $m=b/a=b/f-1=999$  if the distance toward the image (b) is 1m. The calculated (m) and the above specifications lead to that  $D/m=499$  micron/999  $\doteq$  0.5 micron, and  $s/N=1$  micron, and therefore  $D/m + s/N=1.5$  micron.

5        Here,  $10 \div 1.5=6.66$  since the pixel pitch (s) is 10 microns, and the data becomes redundant by rearranging light detecting cells (3a), which are in the 3 units out of 10 units, in the position shifted more than pixel pitch (s).

In turn, light detecting cells (3a) in the other 7 units can effect on the resolution of the reconfigured image. Hence, the resolution decreases only about 30 percent  
10 when focusing on the subject in short distance.

According to the embodiment, the resolution can be considerably increased for the subject having the distance toward the image (b) long as infinite (as indicated in Fig. 5), and moreover, the degradation of resolution can be minor for the subject in close distance (as indicated in Fig. 6). This invention therefore is more applicable and  
15 convenient, compared with conventional systems capable of obtaining merely the reconfigured image in a certain appropriate distance (especially, in flyby distance other than infinite long distance), since being able to provide the image input apparatus which can be used, irrespective of the distance toward the image (b).

Next, another embodiment of the present invention will be described referring to  
20 Fig. 7.

In the above-described embodiment, changing (adjusting) the rearranged position where pixel information of light detecting cells (3a) is rearranged according to the imaging distance (b), as well as changing the positional relationship between micro-lens (1a) and the light detecting cell (3a), have been described.



Here, the following described embodiment is characterized by that, as shown in Fig. 7, the relative position between micro-lens (1a) and light detecting cells (3a) in each unit is adjustable according to the distance toward the image (b), and adjustment responding to the distance toward the image (b) is not necessary when rearranging light  
5 detecting cells (3a).

Concretely, when the pitch of the unit is (D), the number of the unit is (N), and the pitch of the light detecting cell is (s), the relative position between light detecting cells (3a) ( $j=1$  to 6) and micro-lens (1a) shifts by  $(s/N-D/m)$  per unit ( $J=1$  to 4) sequentially along with vertical and horizontal directions in the arrangement of  
10 micro-lens (1a).

As well as the foregoing, when the distance between the subject and micro-lens (1a) is (b,) the distance between micro-lens (1a) and light detecting cells (3a) is (a), and the focal distance of the micro-lens (1a) is (f), the magnification (m) for the subject image can be also described as  $(m=b/a=b/f-1)$ .

15 Here, Fig. 8 is a frame format indicating an example of the reconfigured image rearranging the pixel information (in other words, light detecting cells ( $j=1$  to 6)) of the object reduced images of the subject at infinite taken per unit (U) ( $J=1$  to 4) as shown in Fig. 7. Fig. 8 also indicates a case when the size of the reconfigured image is (n) x (s).

Taking into consideration that each unit (U) has parallax of (D), that the parallax  
20 is reduced to  $(D/m)$  in light detecting cell, and that light detecting cells (3a) in each unit (U) are arranged sequentially and respectively shifted by  $(s/N-D/m)$ , it is capable of obtaining a high resolution image by aligning the pixel information sequentially in order  $j=1$  in  $J=1$  unit,  $j=1$  in  $J=2$  unit,...

According to the present embodiment, even if the distance toward the image (b)

is changed, it is possible to obtain highly fine images only by arranging light detecting cells (3a) in the prescribed order, similar to the case when taking image of the subject at infinite long as shown in Fig. 5, and thereby simplifying the process.

Additionally, as the above explanation and Fig. 8 indicate, this invention is  
5 superior over the above embodiment in the feature of constantly obtaining image with highly fine resolution, irrespective of the distance toward the image (b), since the redundant information would not occur even if the distance toward the image (b) is not infinite.

Also, since this embodiment has the structure of changing the relative position  
10 of micro-lens (1a) and light detecting cells (3a) according to the value (distance) of imaging distance  $b$ ,  $s/N=D/m$  may be applicable depending on the distance toward the image (b). Fig. 9 indicates the positional relationship between micro-lens (1a) and light detecting cells (3a) in each unit (U) when  $s/N=D/m$  is applicable. As the figure shows, the relative position between micro-lens (1a) and light detecting element (3) is  
15 constant, the same structure of conventional one will be obtained.

In accordance with the above structure, Fig.10 indicates a frame format wherein the rearrangement of light detecting cells (3a), when the size of the reconfigured image obtained by rearranging light detecting cells (3a) is  $(m) \times (n) \times (s) (= (n) \times (N) \times (D))$ , is appeared, while Fig. 11 indicates another frame format wherein the rearrangement of  
20 light detecting cells (3a), when the size of the reconfigured image is  $(n) \times (s)$ , is appeared.

Thus, as shown in Figs. 10 and 11, even if the relative position between micro-lens (1a) and light detecting cell (3a) becomes  $s/N=D/m$  (becomes the same in all units), a highly fine object image can be reconfigured according to the subject

embodiment.

Finally, as referring to Figs. 12 and 13, the embodiment wherein image input apparatus (A) achieves to take a color image will be explained below.

5 Figs. 12 and 13 are plain views of light detecting element (3) indicating the arrangement of light detecting cells (3a) per unit, and show the cases when arraying (n) number of light detecting cells (3a) both in the horizontal and the vertical directions.

Here, in order to achieve color images, it is characterized in the present embodiment that light detecting cells (3a) are divided into several regions (4 regions in the present embodiment), while the color filters are arranged in each of the divided  
10 regions.

Here, Fig. 12 indicates the case when primary color filters comprising Green(G), Red(R), and Blue(B) are applied. Color information, including the primary colors: green, red, and blue, can be obtained by, like foregoing embodiments, having micro-lens (1a) arranged to have different relative position with light detecting element  
15 (3) which has the above-mentioned dividing structure, and by providing prescribed signal processing to the object reduced images obtained per color.

In addition, regarding the array of the color filters, green that has highest human visibility is applied to a plurality of regions. Thus, signal-to-noise ratio of green signal is improved, thereby achieving improvement of the image quality.

20 On the other hand, Fig. 13 indicates the case when complementary color filters: Cyan(Cy), Yellow(Ye), Magenta(Mg), and Green(G) as four-color filter, are applied.

This case also achieves obtaining the color information of green and red and blue by providing prescribed signal processing, same as the primary color filters.

The relationship between Cyan(Cy), Yellow(Ye), Magenta(Mg), and Green

(G) is;

$$(Cy)=(B)+(G)$$

$$(Ye)=(G)+(R)$$

$$(Mg)=(R)+(B)$$

5        Each colors: (R), (G) and (B) can be decided from the obtained image information of (Cy), (Ye) and (Mg) by calculation, and moreover, (G) can be calculated from light detecting cells (3a) comprising filter (G).

         Firstly, the object image is reconfigured in regard to Cyan(Cy), Yellow(Ye), Magenta(Mg) and Green(G), from which the three primary colors, i.e. green, red and  
10    blue, is obtained by calculation.

         Thus, the present embodiment finally enables colorizing of the final reconfigured image, and further, prevents increase of production cost for its simple structure of merely arranging the predetermined color filters to light detecting cells (3a).

         As described above, the present invention can obtain the object reduced images  
15    differing in each unit even if the distance between the image input apparatus (A) and the subject is long (infinitely long, for example), and thereby achieving a high resolution, reconfigured image that is reconfigured based on those object reduced images.

         Moreover, the colorization of the reconfigured image can be realized with the simple structure of providing the predetermined color filters to the light detecting cells  
20    formed within the light detecting element in the image input apparatus.

**WHAT IS CLAIMED IS:**

1. An image input apparatus comprising:  
a micro-lens array having a plurality of micro-lenses; and  
5 a light detecting element facing said micro-lens array;

wherein a single object image of an subject is obtained by rearranging image information of a plurality of object reduced images focused on a prescribed region on said light detecting element by said micro-lens array, and a relative position between said micro-lens and said prescribed region on said light detecting element, on which  
10 said object reduced images are focused as responding to each one of said micro-lenses, is arrayed differently for each of said micro-lens.

2. An image input apparatus according to claim 1, wherein said relative position shifts sequentially at specified quantity in vertical and horizontal directions in  
15 an array of said micro-lenses.

3. An image input apparatus according to claim 2, wherein said specified quantity is  $s/N$ .  
:(s) is a pitch of said light detecting element, and (N) is a number of said micro-lens  
20 units.

4. An image input apparatus according to claim 1, wherein said relative position is formed adjustable according to a first rule based on a distance between said micro-lens and said subject.

5. An image input apparatus according to claim 4, wherein said first rule is that said relative position shifts sequentially by  $(s/N-D/m)$  in vertical and horizontal directions in said micro-lens array.

5 : (s) indicates a pitch of said light detecting element, (N) indicates a number of units of said micro-lens, (D) indicates a pitch of said micro-lens, and (m) indicates a magnification of said micro-lens for said subject. Also, (m) indicates a ratio  $(b/a=m)$  of distance (b) between said micro-lens and said subject to a distance a between said micro-lens and said light detecting element.

10

6. An image input apparatus according to any of claim 1 to claim 5, wherein, in process of obtaining a single object image by rearranging said image information of a plurality of object reduced images focused on said prescribed region on said light detecting element per said micro-lens, rearranged positions on said object image, to  
15 where said image information of said object reduced images are rearranged, are determined on the basis of said relative position.

7. An image input apparatus according to any of claim 1 to claim 3, wherein, in process of obtaining a single object image by rearranging said image information of a  
20 plurality of object reduced images focused on said prescribed region on said light detecting element per said micro-lens, said rearranged positions on said object image, to where said image information of said object reduced images are rearranged, are determined according to a second rule on the basis of a distance between said micro-lens and said subject.

8. An image input apparatus according to claim 7, wherein said second rule is that said relative position shifts sequentially by  $(s/N-D/m)$  in vertical and horizontal directions in said micro-lens array.

5 : (s) indicates a pitch of said light detecting element, (N) indicates a number of units of said micro-lens, (D) indicates a pitch of said micro-lens, and (m) indicates a magnification of said micro-lens for said subject. Also, (m) indicates a ratio  $(b/a=m)$  of distance (b) between said micro-lens and said subject to a distance a between said micro-lens and said light detecting element.

10

9. An image input apparatus according to any of claim 1 to claim 8, wherein said light detecting element contains a plurality of light detecting cells, and said light detecting cells are divided into a plurality of regions to which color filters are disposed respectively.

## ABSTRACT OF THE DISCLOSURE

An image input apparatus which reconfigures a single reconfigured image from a plurality of low-resolution, object reduced images formed in a specified region on the light detecting element by the micro-lens array, wherein a high-resolution, single reconfigured image can be obtained even if the distance between the subject and the micro-lens array is long (infinitely long, for example), and further a reconfigured image can be realized in colors. The image input apparatus is characterized in that the relative distance between a micro-lens (1a) and light detecting cells (3a) in a specified region, where object reduced images corresponding to the micro-lens (1a) are formed, is different in each micro-lenses (1a). In addition, the light detecting cells (3a) are divided into a plurality of regions, and color filters (primary color filter, or complementary color filter, for example) are disposed in each of the divided regions.



Fig. 1

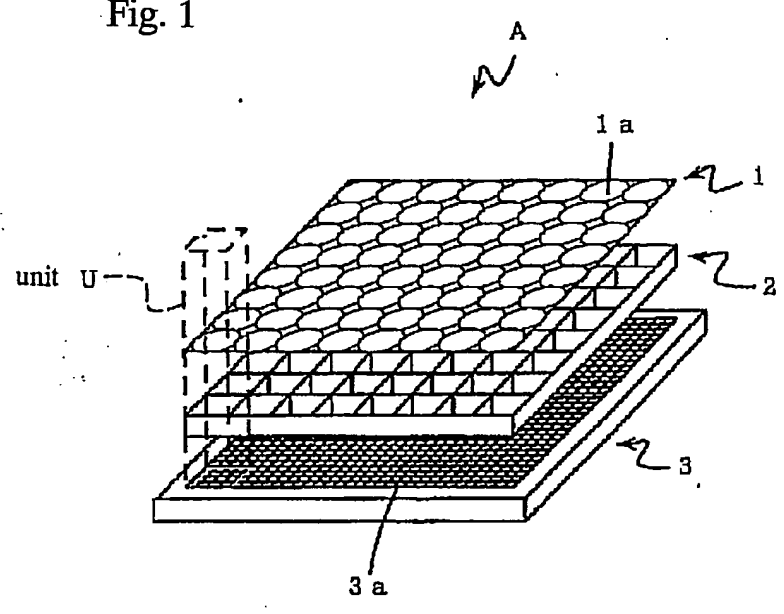


Fig. 2

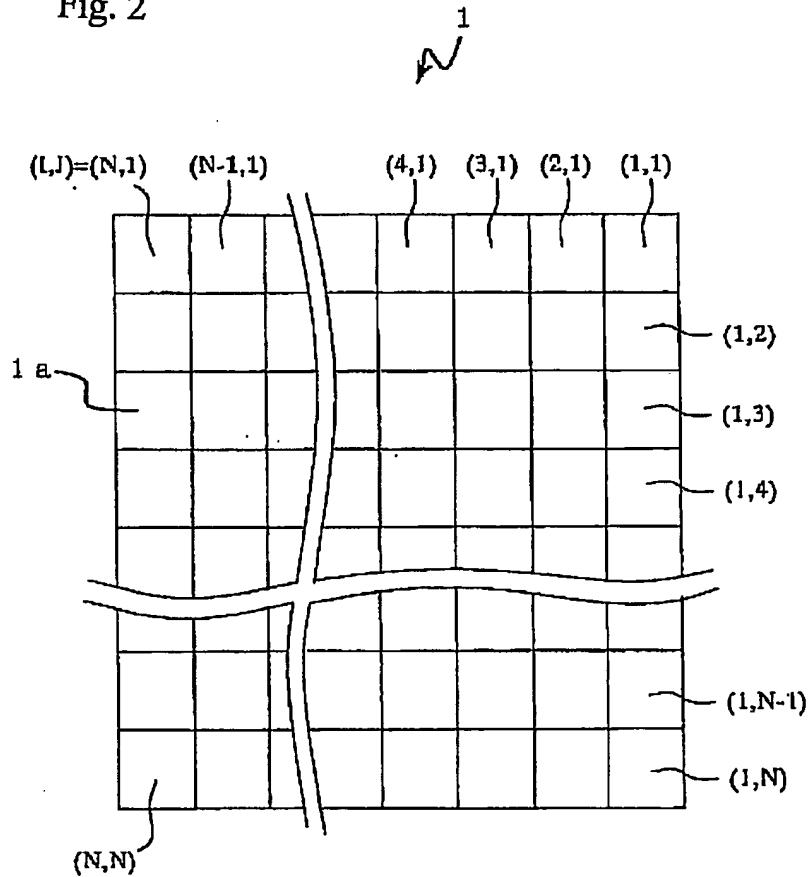


Fig. 3

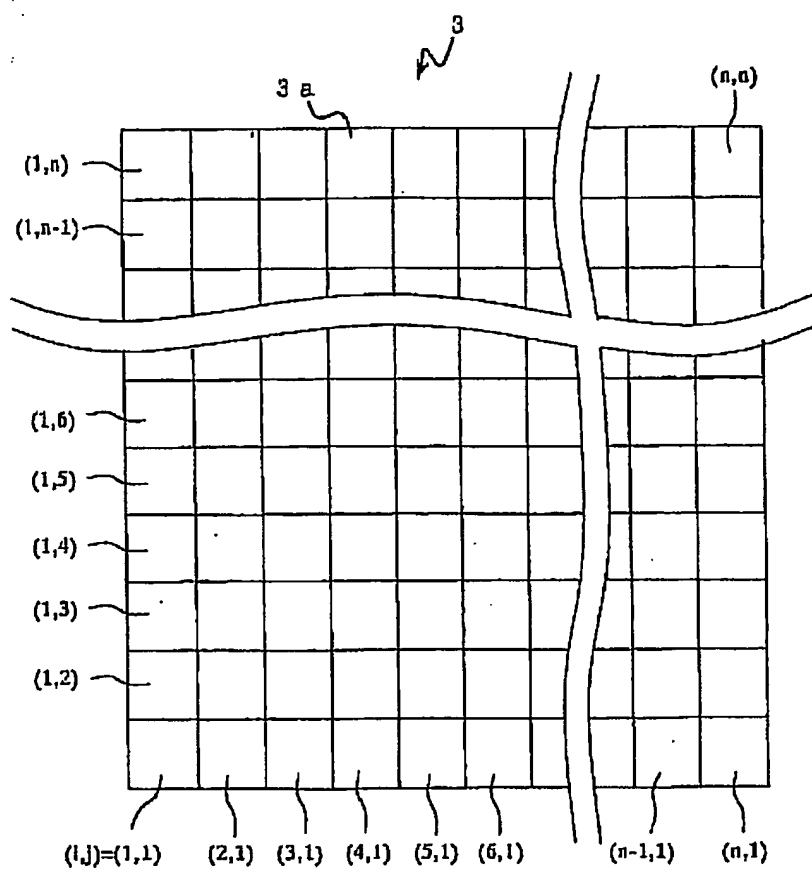


Fig. 4

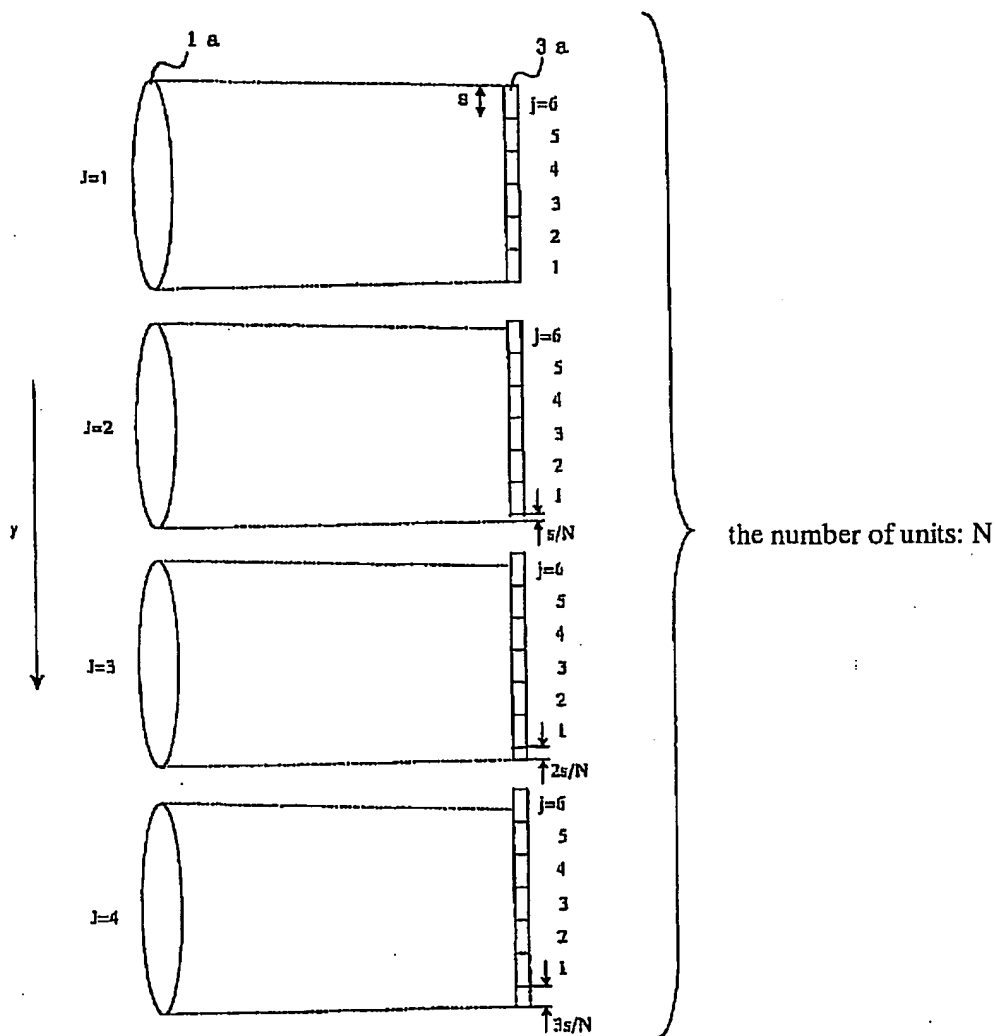


Fig. 5

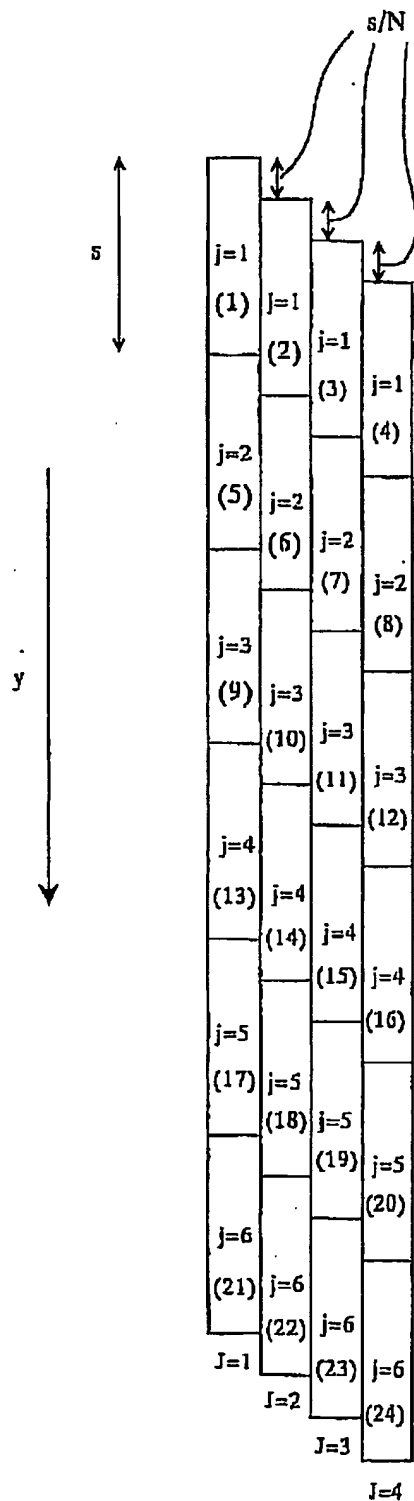


Fig. 6

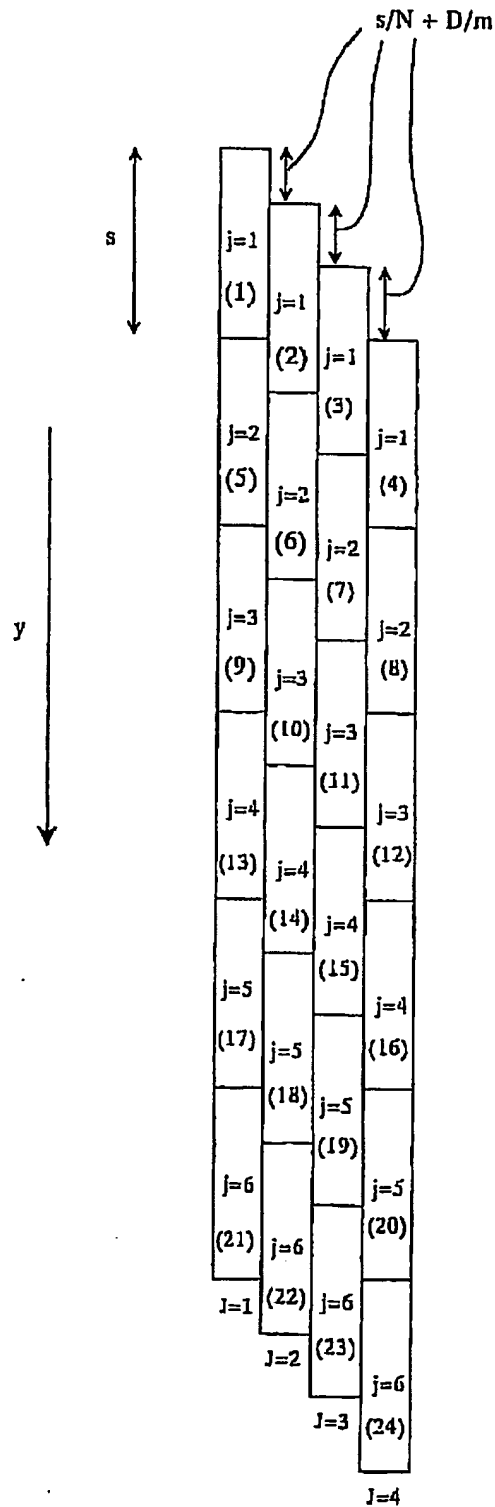


Fig. 7

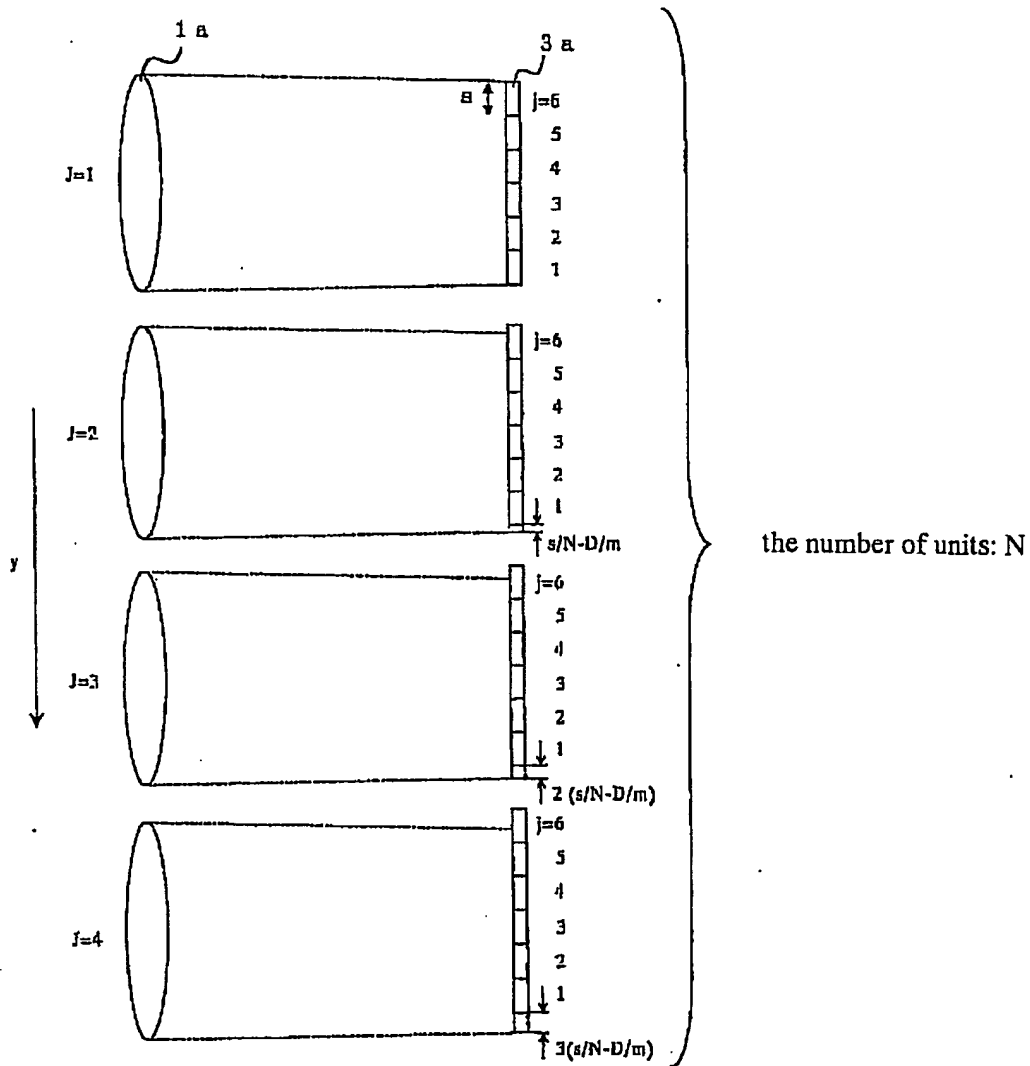


Fig. 8


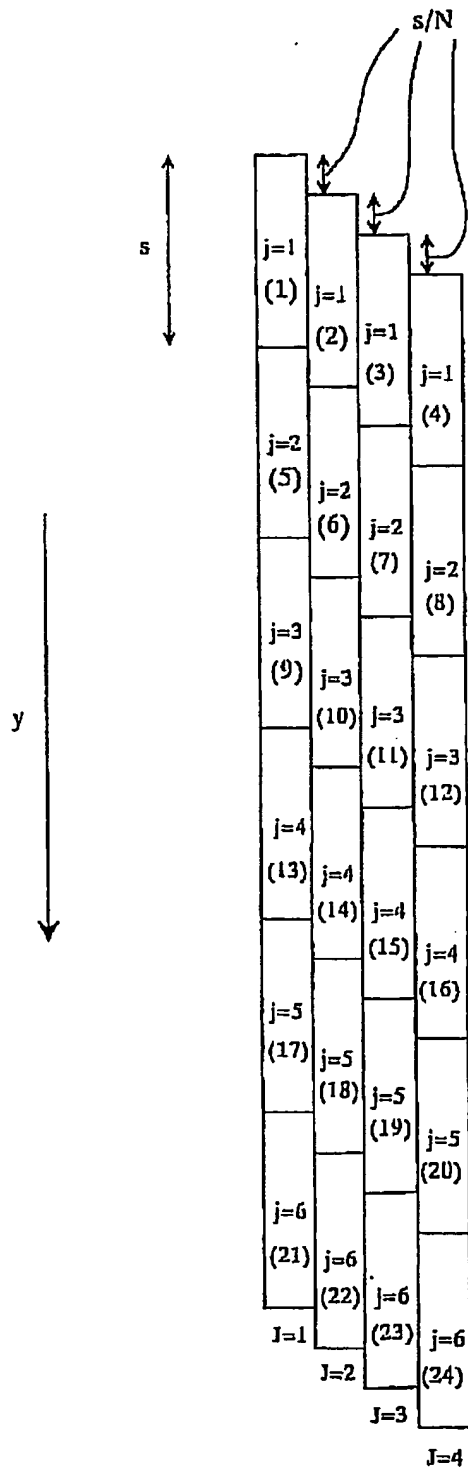




Fig. 9

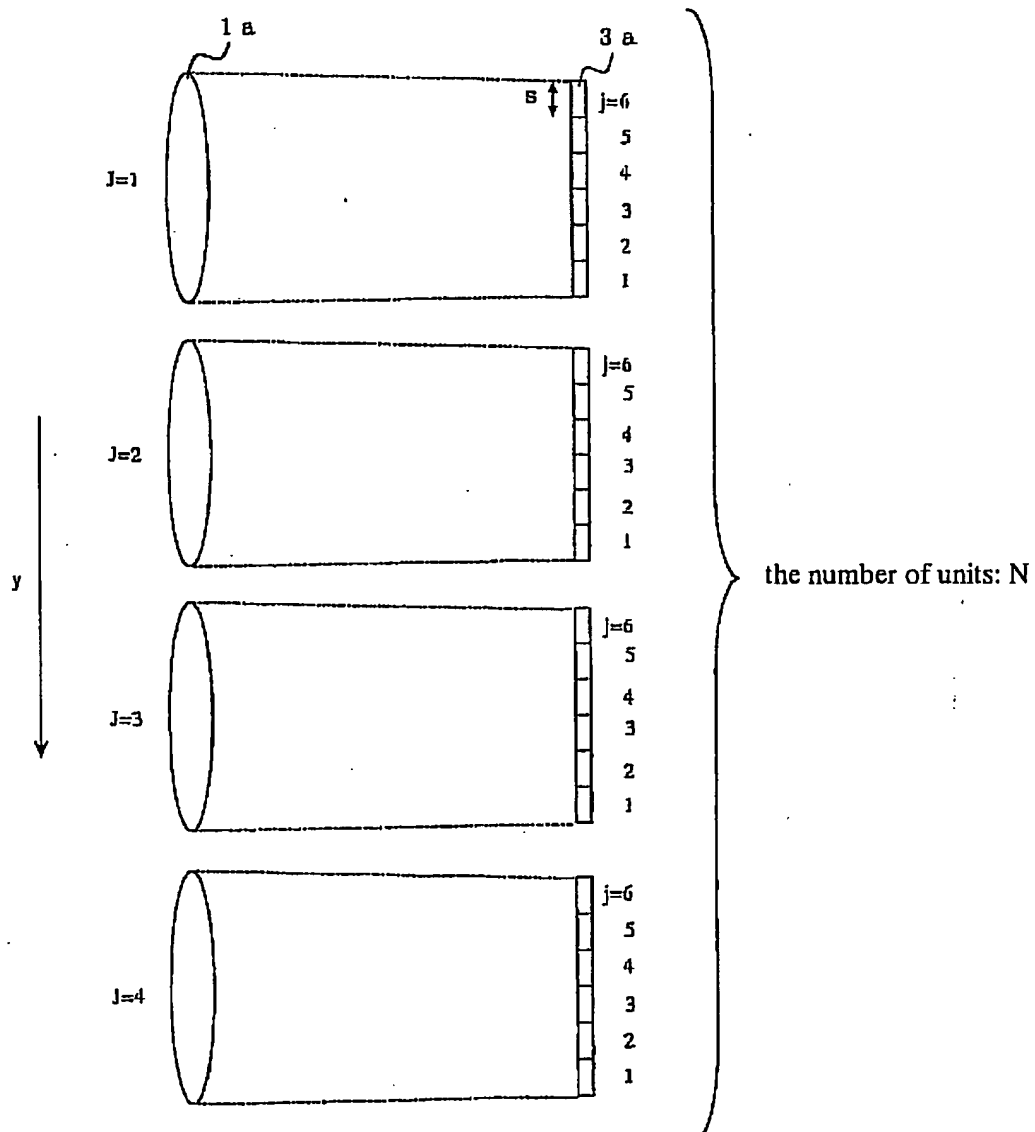

**ms=ND**

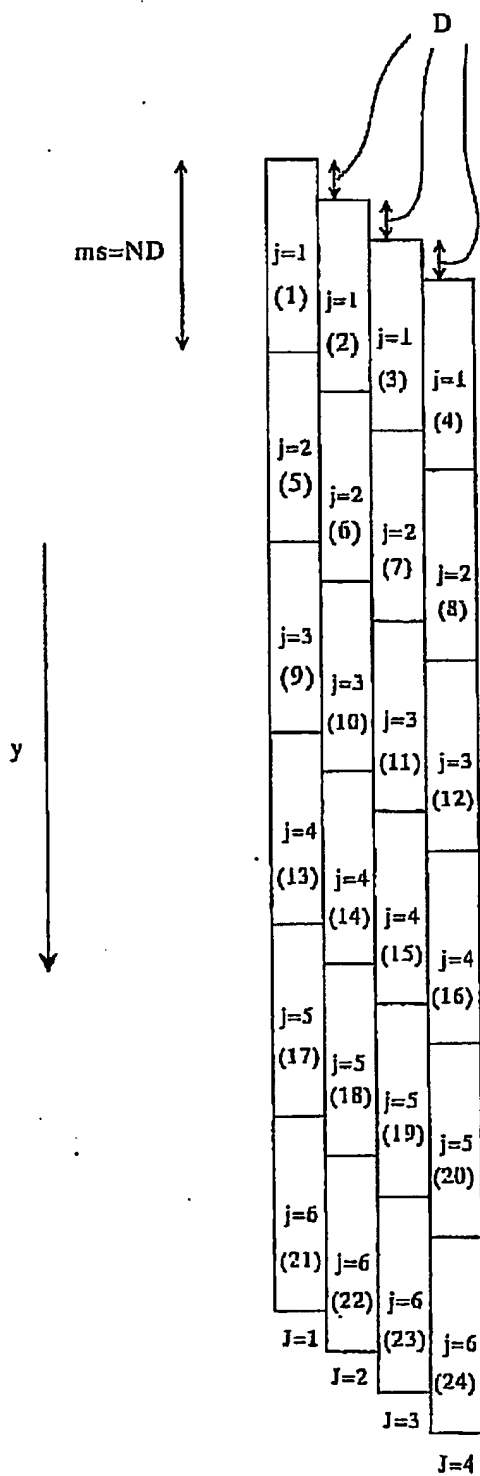


Fig. 11

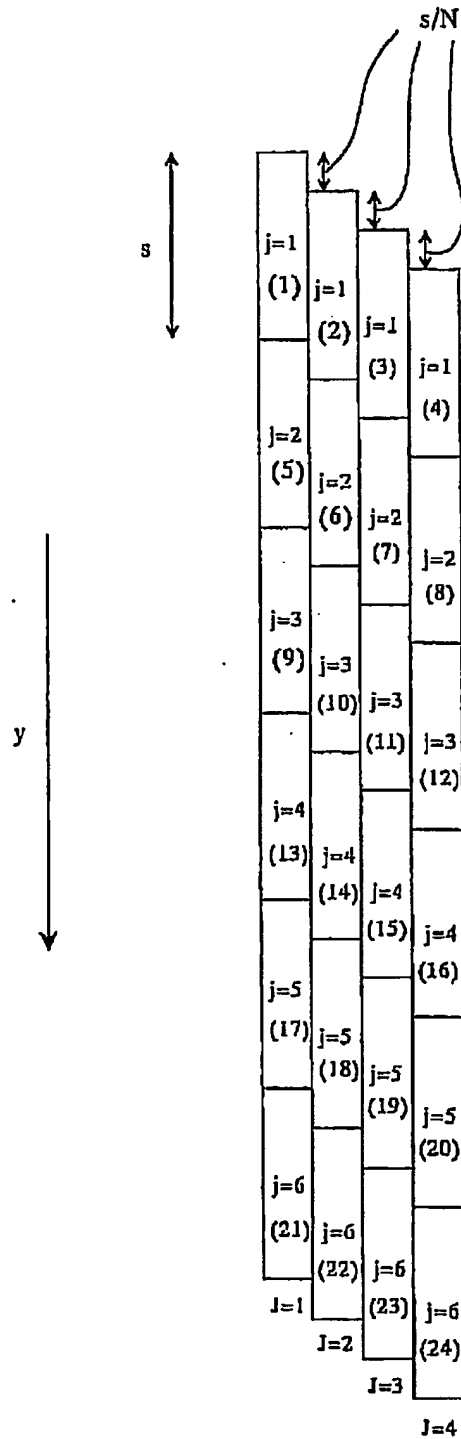




Fig. 13

